

# Uni beer

UNIFRIGOR





## Uni beer

is the line of products for the cooling of kegs drinks designed in particular for those of 20 and 30 liters.

**Unibeer** line has been created especially for the cooling of the cask-conditioned beers. Our system said "cold keg", compared with that "hot keg", it offers several advantages:



### EASY INSTALLATION:

installation is quite immediate and you do not need to do any brickwork in your brewery. You can either insert it in your counter or use it stand alone. It can be equipped also with wheels in order to make easier moving it.



### SAVING CO<sub>2</sub>:

with **Unibeer** kegs have stored to a temperature of about 3° C and are located conveniently under the dispensing column with the result of requiring only about 850 gr. CO<sub>2</sub>, while the traditional system with the keg positioned in the cellar, to a temperature of about 25° C, need at least 2.5 kg. CO<sub>2</sub> to push the beer spilling up to where it will be cooled by the coil of the "beer cooler".



### BETTER QUALITY OF DRAFTED BEER:

less CO<sub>2</sub> is used for tapping and better will be the quality of the beer we serve our customers.



### LONGER DURATION OF AN OPEN KEG:

reducing the amount of CO<sub>2</sub> necessary for tapping also allows to extend the maximum period of use of an open keg, before having to replace it though not exhausted, varying from a maximum period of 3-4 days to the traditional system to "hot keg", to about 4 weeks for the system to "cold keg" kept in our **Unibeer**.



### QUICKER REPLACEMENT SYSTEM OF KEG:

having conceived the device to contain a keg in use and another in reserve, in the moment in which exhausts a keg, the replacement operation is much more rapid because it will be sufficient to connect the keg in reserve to tapping system without having move from behind the counter obtaining a considerable saving of time.

# Uni beer



Uni beer

COOL GREEN



### COOL GREEN RO - B 1110




### FEATURES and FINISHING

- KEGS CAPACITY: See the attached drawings
- STRUCTURE: White plasticized steel used for the interior and dark skinplate for the exterior of the cabinet.
- BACK SIDE: Dark grey skinplate, for island use and for every customization (stickers or something else)
- TOP: Dark grey skinplate top for gaskets protection and nice finishing
- BOTTOM: Reinforced internal bottom to receive heavy kegs
- TANK: Completely free space inside the tank
- HANDLES: Integrated handles
- WHEELS: 80 or 100 mm. diam. with stopper
- FEETS: Adjustable feet from 110 to 140 mm height
- MOTOR UNIT: Compact, completely extractable and replaceable

### REFRIGERATION

- GAZ: Ecologic R 290
- TEMPERATURE: Adjustable from +1°C to +5°C
- REFRIGERATION: Air forced system
- CONTROL PANEL: Easy access by hinged door for easy cleaning and maintenance
- INSTALLATION: Plug in system
- CONNECTION: Predisposition for connections on both sides

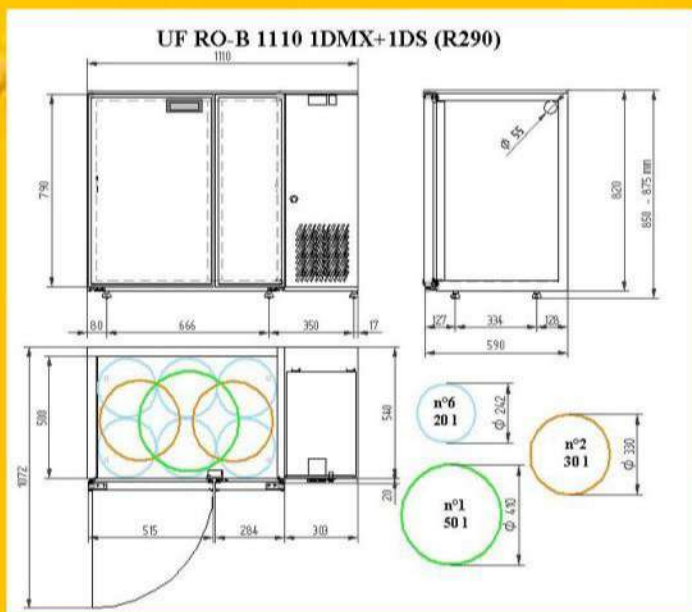



Uni beer


COOL GREEN



### COOL GREEN RO B 2F 620




UF RO-B 620 1DSX (R290)

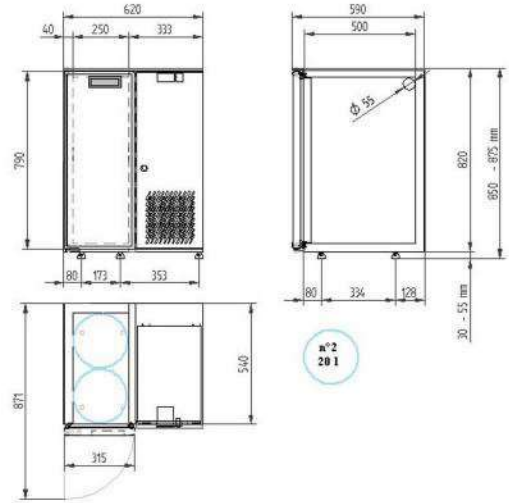


### COOL GREEN RO B 880




UF RO-B 880 1DX (R290)

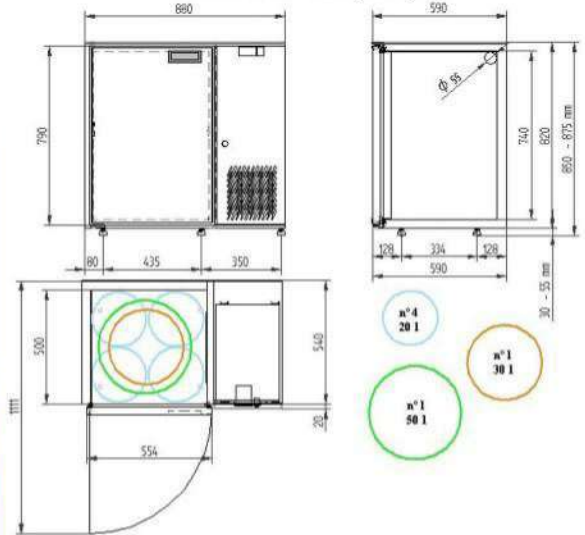

### COOL GREEN RO-B 1350

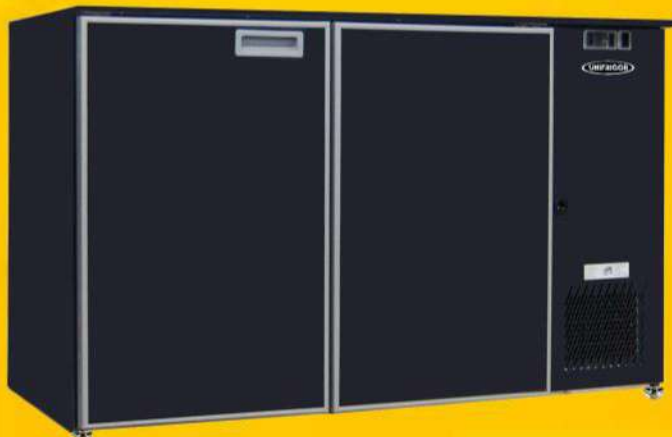

UF RO-B 1350 2DMX (R290)

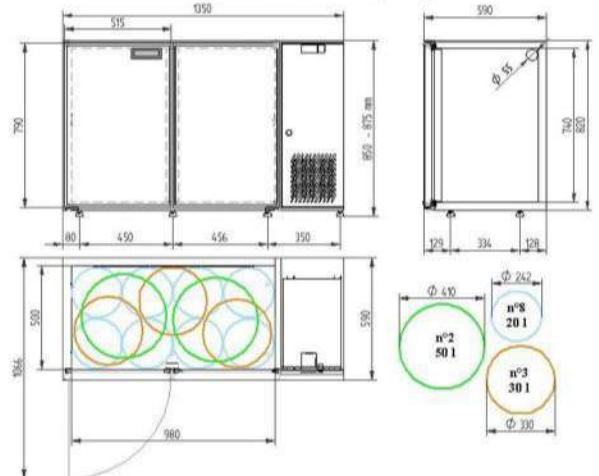



### RO - BGS 685 "Party"

with condensing unit and without work top

Size: 685 x 610 x 1073,5 mm

Volume: 170 l

capacity n.1 keg of 30 litres ø 330 mm

capacity n. 2 kegs of 20 litres ø 242 mm

Packing dimensions : 700 x 650 x 1100 mm

Gross weight: 59 kg

Coolant type: R 134 a

Total absorption: 204 W 0,92 A

V/Hz: 230/50/1

**SKINPLATE**

**Code: 114106**

**STAINLESS STEEL**

**Code: 114280**

*Party*



### RO - BGS 685 "Party Step"

with condensing unit and without work top

Size: 685 x 632 x 1043 mm

Volume: 210 l

capacity n.1 keg of 30 litres ø330 mm

capacity n. 2 kegs of 20 litres ø 242 mm

Packing dimensions: 695 x 665 x 1200

Gross weight: 88 kg

Coolant type: R 134 a

Total absorption: 204 W 0,92 A

V/Hz: 230/50/1

**SKINPLATE**

**Code: 114106**

**STAINLESS STEEL**

**Code: 114280**

*Step*



### RO - BGS 900 2D "Tallest"

with condensing unit and without work top

Size: 900 x 660 x 1128 mm

Volume: 300 l

capacity n.6 kegs of 20 litres ø 240 mm

capacity n.2 kegs of 30 litres ø 330 mm

Packing dimensions: 1250 x 760 x 1130

Gross weight: 106 kg

Coolant type: R134a

Total absorption: 562 W 0,92 A

V/Hz: 230/50/1

**SKINPLATE**

**Code: 114912**

**STAINLESS STEEL**

**Code: 114918**

*Tallest*



BACK IN GALVANIZED SHEET  
ALSO AVAILABLE  
BACK IN DARK GRAY SKINPLATE  
OR STAINLESS STEEL



# UNI beer



# Extra Large

### ROX 1880 3DM

Size: 1880x700x850/875 mm

Volume: 617 l

Reinforced bottom for kegs

Packing dimensions: 1915x765x950

Gross weight: 151 kg

Coolant type: R 134 a 27/5000

SKINPLATE

Code: 114005



### ROX 2140 3DX

Size: 2140x700x850/875 mm

Volume: 736 l 27/5000

Reinforced bottom for kegs

Packing dimensions : 2175x765x950

Gross weight: 160 kg

Coolant type: R 134 a

SKINPLATE

Code: 114007



### ROX 2400 4DM

Size: 2400x700x850/875 mm

Volume: 814 l

Reinforced bottom for kegs

Packing dimensions: 2435x765x950

Gross weight: 172 kg

Coolant type: R 134 a

SKINPLATE

Code: 114009



### ROX 2740 4DX

Size: 2740x700x850/875 mm

Volume: 967 l

Reinforced bottom for kegs


Packing dimensions: 2775x765x950

Gross weight: 177 kg

Coolant type: R 134 a

SKINPLATE

Code: 114011

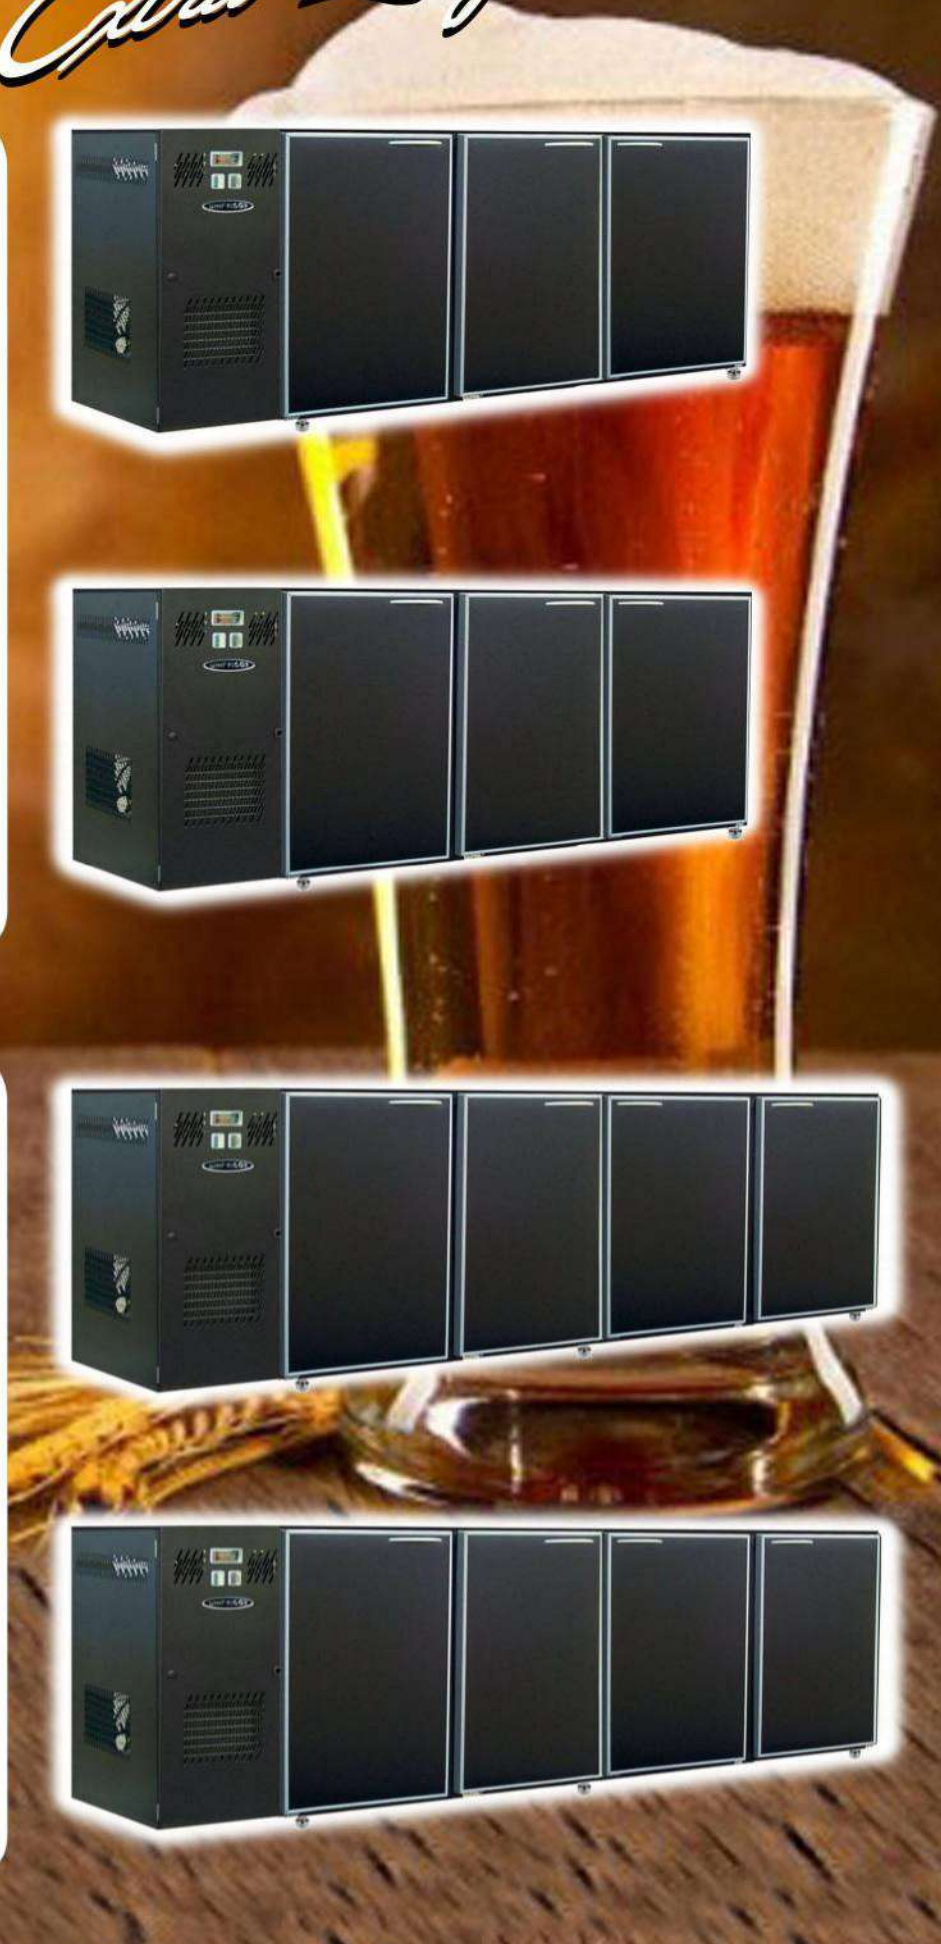



Uni beer

OPTIONAL



FOR ALL MODELS

Optional/model	Code
 Column with one free flow tap in brushed stainless steel	119561
 Column with two free flow taps in brushed stainless steel	119562
 Column with 3 stainless steel free flow taps, brilliant chrome finishing touch	119571
 Column model with 4 stainless steel free flow taps, brilliant chrome finishing touch	119572
 D-well type keg head	119563
 Flat-type keg head	119564
 Pressure regulator double stage 1,5 bar for drafting beer Keg	119565
 KIT wheels (4 revolving wheels, 2 equipped with brake)	119126
 Stainless steel drip tray 220x150 mm	117993
 Stainless steel drip tray 300x180 mm	117994
 Stainless steel drip tray 400x220 mm	117995
 Kit drip tray and rinse glasses	119885
 kit column cooling	119869
 Cool Glasses	119872

The company reserves the right to make changes, without any previous notice, to the products shown in the catalogue.



# Uni *beer*

Fully designed and manufactured in Italy



S.S. 31 n. 22  
15040 Occimiano (AL) - Italy  
Tel. + 39 0142 809256  
Fax + 39 0142 809557

[www.unifrigor.com](http://www.unifrigor.com)  
[info@unifrigor.com](mailto:info@unifrigor.com)

